

Ancast Internet Acceleration

Best Practice

Product Documentation



Copyright Notice

©2013-2024 Tencent Cloud. All rights reserved.

Copyright in this document is exclusively owned by Tencent Cloud. You must not reproduce, modify, copy or distribute in any way, in whole or in part, the contents of this document without Tencent Cloud's the prior written consent.

Trademark Notice



All trademarks associated with Tencent Cloud and its services are owned by Tencent Cloud Computing (Beijing) Company Limited and its affiliated companies. Trademarks of third parties referred to in this document are owned by their respective proprietors.


Service Statement

This document is intended to provide users with general information about Tencent Cloud's products and services only and does not form part of Tencent Cloud's terms and conditions. Tencent Cloud's products or services are subject to change. Specific products and services and the standards applicable to them are exclusively provided for in Tencent Cloud's applicable terms and conditions.

Best Practice

Last updated : 2024-10-22 17:12:31

Connection Process

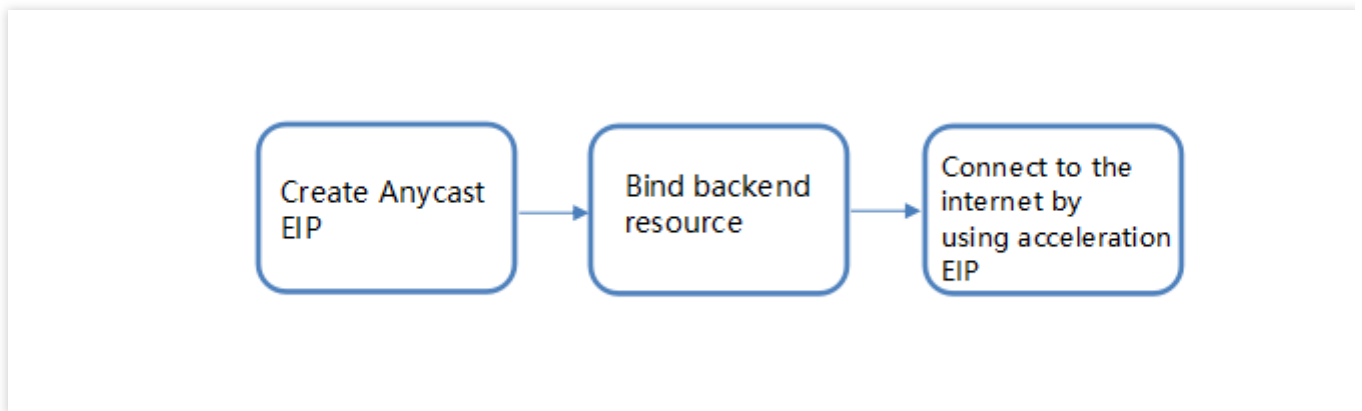

Creating Anycast EIP

1. Log in to the [EIP Console](#) and click **Apply**.
2. Select the region, bandwidth cap, and quantity according to your actual needs, select **Acceleration IP** as the IP address type, and click **OK** to create an Anycast EIP.

Binding backend resource

Log in to the [EIP Console](#) and select **More > Bind** to bind specified resources. This document uses CVM as an example.

Connecting to the internet by using acceleration EIP

After logging in to the bound backend resource, you can connect to the internet through the acceleration EIP to use AIA. As a CVM instance is bound as an example in this document, you can use AIA after logging in to the instance.

Other Common Operations

Changing Anycast EIP configuration

Adjusting bandwidth

Note:

Only bill-by-EIP/CLB accounts can adjust the bandwidth in the EIP console. For bill-by-CVM accounts, please adjust the bandwidth in the corresponding [CVM instance](#) or [NAT gateway](#). If you are not sure of your account type, please see [Account Type](#).

1. Log in to the [EIP Console](#).
2. In the EIP list, select the EIP you want to use, and click **Adjust Network**.